

ELKA 15

Origin - Provenienza : C.E.E.



STRUCTURE

SEAT

Anatomical support in 10/10 glued beech multilayer (10 mm thickness).

Covering shell in injected polypropylene (30/10 thickness) hooked to the support by means of clips and screws.

BACKREST

Support in fibreglass reinforced nylon.

PADDING

SEAT

Polyurethane foam rubber, without CFC, 40 kg/m3 density, 55 mm thickness.

UPHOLSTERY

SEAT

Leather/Fabric stitched and mounted without glues

BACKREST

High resistance 100% polyester elastic mesh.

MECHANISM DYNAMIC SYNCHRON

B-REX synchro mechanism, lockable in 4 positions, with anti-shock system and body weight tension adjustment.

SEAT HEIGHT ADJUSTMENT

Through a class 3 gas lift with 130 mm stroke, complying with DIN 4550/4551 standards.

LUMBAR SUPPORT ADJUSTMENT (optional)

Manually 80 mm stroke lockable in all positions.

ARM-RESTS (optional)

BR4P Height adjustable arm-rests (100 mm stroke), swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad, width adjustable through a handle, 30 mm stroke on each side. Elbow support in soft polyurethane
BR2D Nylon arm-rests, upper pad in soft polyurethane. Height adjustable with 60 mm stroke, width adjustable through a handle, 35 mm stroke on each side.

BR35 Steel support, arm-rests swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad with 50 mm stroke. Height adjustable with manual system, 70 mm stroke. Upper part in soft polyurethane. Arm-rest fixing by means of screws. Elbow support in soft polyurethane.

BR1E Polypropylene arm-rests, height adjustable with manual system, 60 mm stroke, internal structure in reinforced polypropylene, upper part in polypropylene, hooked to the seat.

BR14 Nylon arm-rests swivelling to the right and left by 30 degrees, forward and backward adjustable upper pad with 50 mm stroke. Height adjustable with manual system, 70 mm stroke. Upper part in soft polyurethane. Arm-rest fixing by means of screws.

ELKA 15


Origin -Provenienza : C.E.E.

BASE

5-star base in nylon (fibreglass reinforced), Ø 700 mm.
OPTIONAL : 5-star base in brushed aluminium
(with chromium plated effect) Ø 700 mm.

CASTORS

Polypropylene self-braking double castors, complying with
EN1335-2 standard, preventing any accidental movement of
the chair, Ø 50 mm.
OPTIONAL : black soft castors with grey rubber Ø 50 mm.

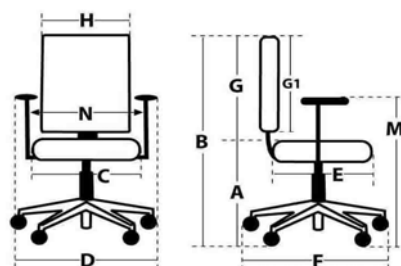

DIMENSIONS - INGOMBRI

A	Seat height	Mini	420 mm
		Maxi	550 mm
B	Total height	Mini	995 mm
		Maxi	1125 mm
C	Seat width		495 mm
D	Max total width		680 mm
E	Seat depth		455 mm
F	Total depth		680 mm
G	Backrest height		580 mm
G1	Backrest lumbar height adjustment		100 mm
H	Backrest width		445 mm
	Seat depth adjustment		
M	Arm-rest height adjustment I	Mini	620 mm
		Maxi	680 mm



WEIGHT

Without armrests	10,50 Kg
With armrests	12,70 Kg

VOLUME

Without armrests	0,19 m3
With armrests	0,24 m3

Packaging 1 units per box